Lingke Starry M3
iOS Firmware OTA Upgrade Tutorial

Platform: iOS | Tool: GAIA Client | Target: Speaker firmware



GAIA Client
Download from the App Store

When do you need this upgrade?

If the Lingke APP can find **Lingke Starry M3** but **fails to connect**, the speaker is still running the old firmware. In that case, follow this tutorial and use the **GAIA Client** app to upgrade the speaker.

Latest firmware: V1.0.30

Get ready

- **Lingke APP (iOS):** App Store
- **Before upgrading:** save the firmware file to your phone and remember where it is saved

Upgrade Overview (4 steps)

1. **Connect** — Pair via Bluetooth, open device info
2. **Updates page** — Settings → Software Updates
3. **Start upgrade** — Select firmware, tap START
4. **Confirm & done** — Wait for 100%, tap Exit


STEP 1

Connect the speaker


Turn on the speaker and pair it with your phone

1. Turn on the speaker and connect it to your phone via **Bluetooth**.

2. Open the **GAIA Client** app, find **Lingke Starry M3** and tap it to enter the information page.

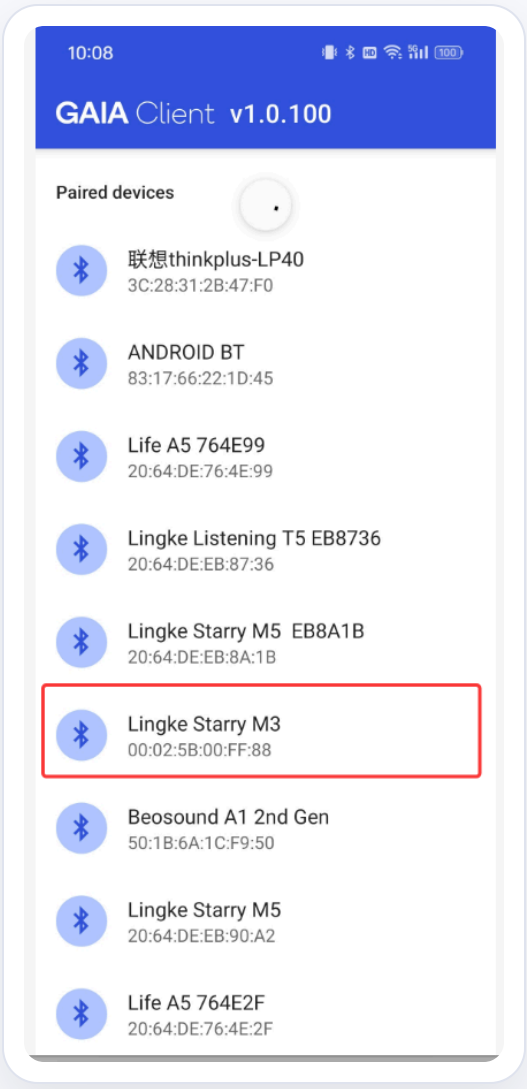

Find Lingke Starry M3

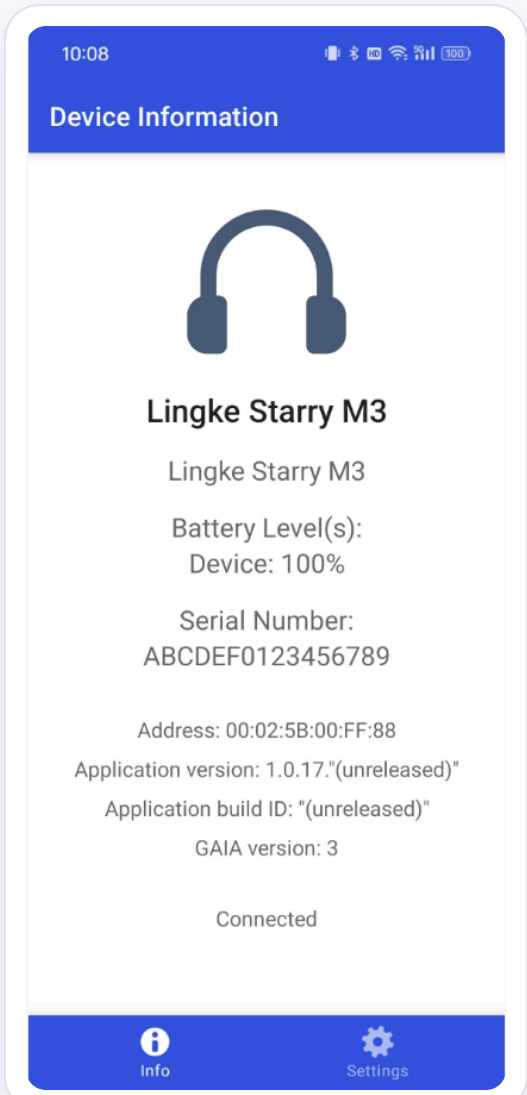

Device information page


STEP 2

Go to the software update page


Settings → Software Updates

1 Tap **"Settings"** at the bottom of the information page.

2 Select **"Software Updates"** to enter the software update page.

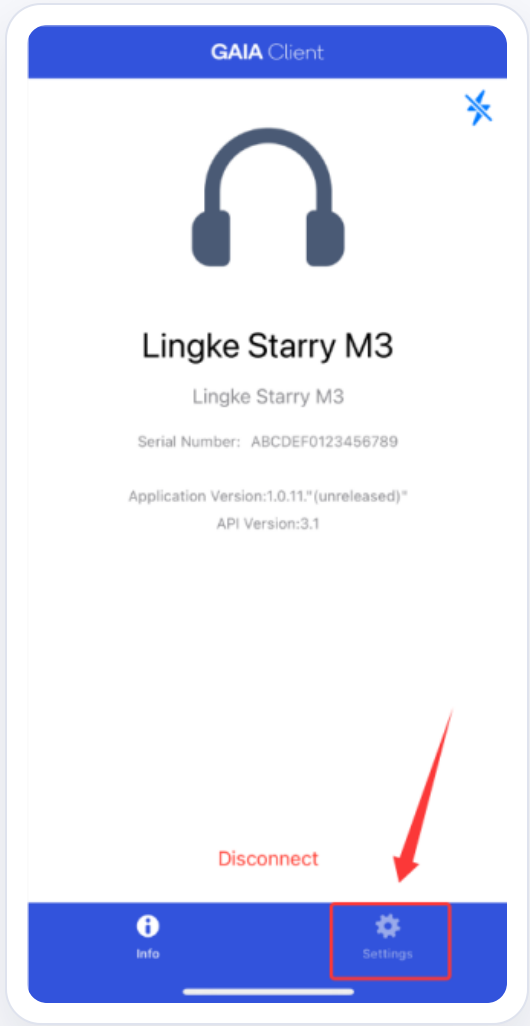

Tap Settings at the bottom

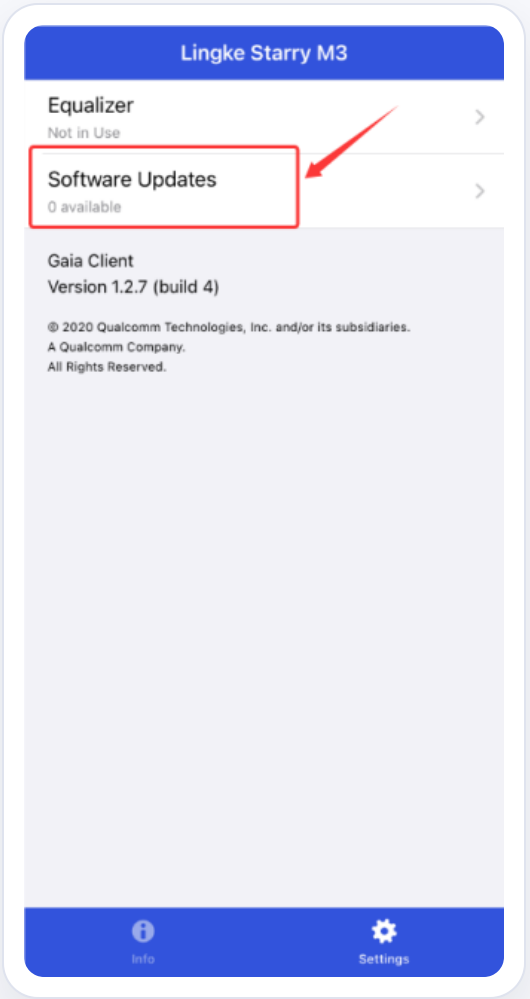

Select Software Updates


STEP 3

Select the firmware and start the upgrade


Select Update File → START

1. On the software update page, tap **"SELECT UPGRADE FILE"** to proceed.


2. Find and select the firmware file, then tap **"START"** to begin the upgrade.

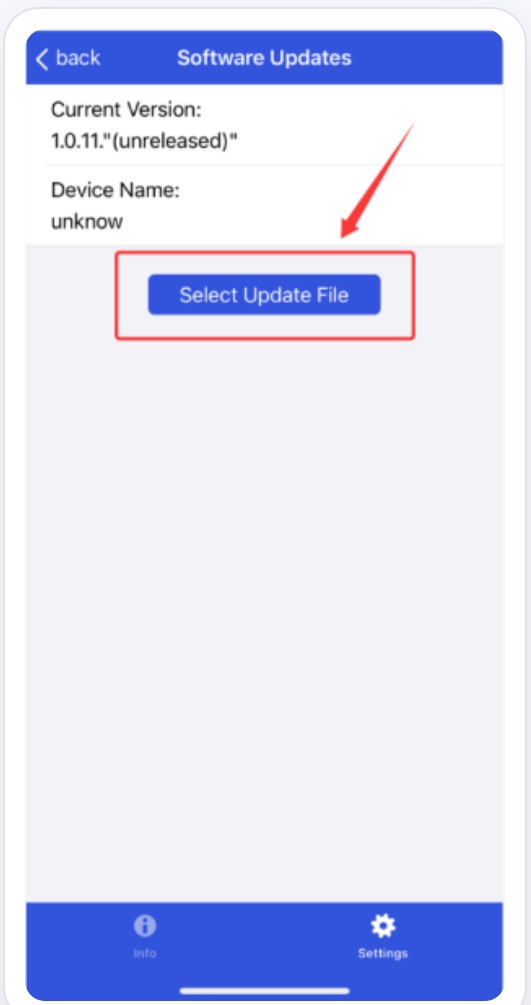


Tap Select Update File

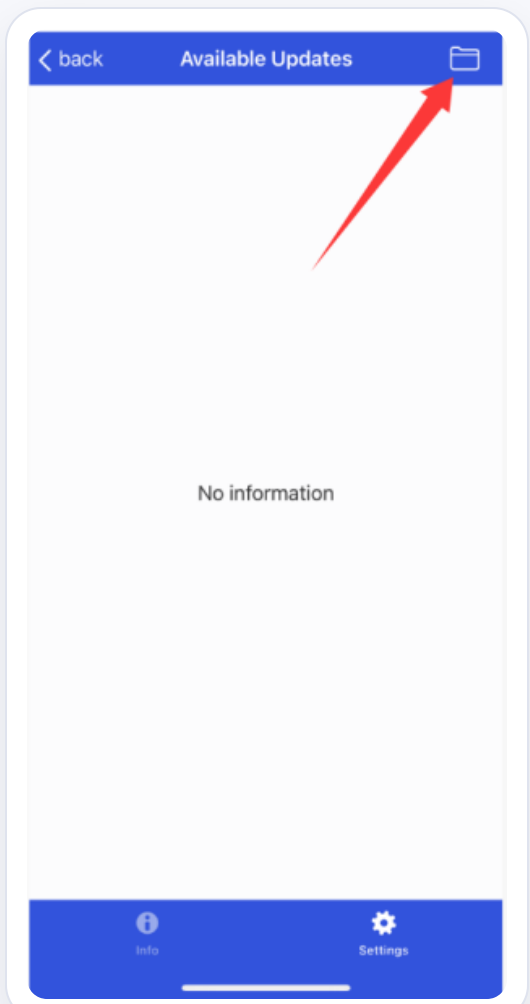

Tap the folder icon

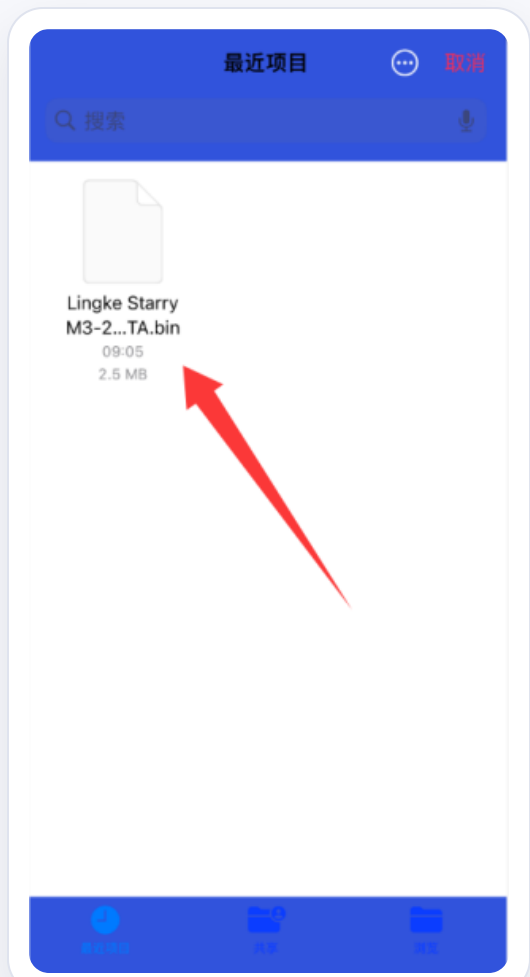

Select the firmware file

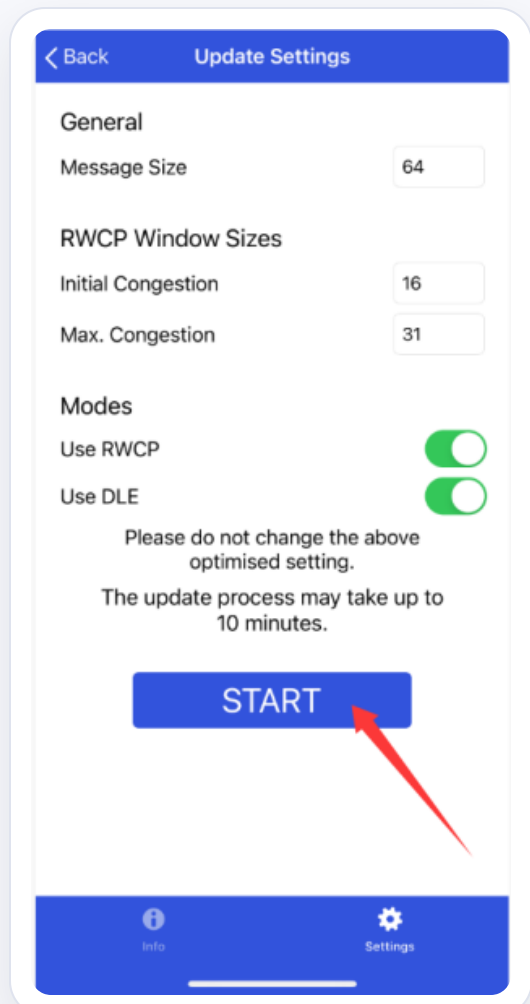

Tap START to begin


⚠ **Note** The firmware must first be saved to your phone — remember where it is saved.

STEP 4


Wait for completion and verify the version

The upgrade takes a few minutes — keep the speaker powered and your phone nearby


1. When the progress bar reaches **100%**, the speaker restarts automatically (you will hear the power-on prompt).
2. When the upgrade is completed successfully, tap **"EXIT"** to finish.
3. Return to the software update page to check whether the software is the latest version.

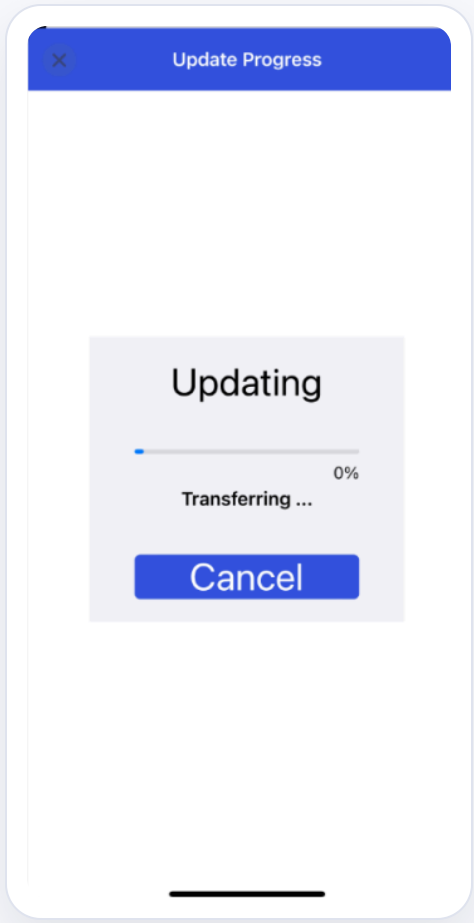

Upgrading

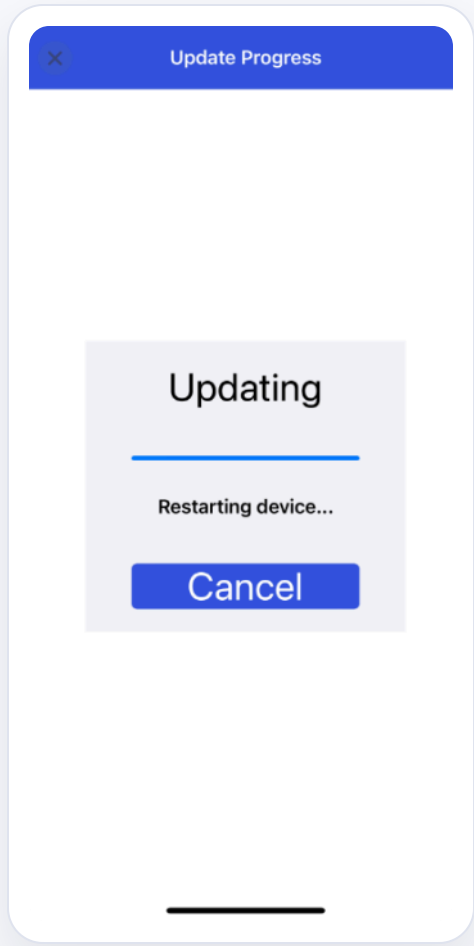

Restarting

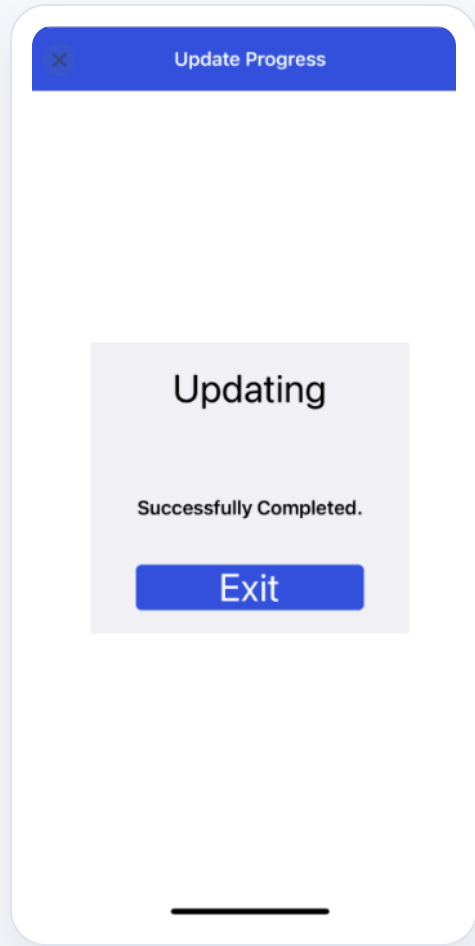

Completed — tap Exit

Tip To cancel during the upgrade, tap "CANCEL" in the center at any time.

Upgrade complete ✓

Your speaker is now running the latest firmware. Please connect it with the **Lingke APP** and enjoy.

Get the latest firmware

Visit the **SUPPORT** page on the Lingke official website for this guide and the latest product firmware.

Watch the full video

The full operation video is available at the bottom of the **EXPLORE** section on the website.

If you have any questions, contact us via the official website · **Thank you for choosing LINGKE**

Recap

1. **Connect** — Pair via Bluetooth, open device info
2. **Updates page** — Settings → Software Updates
3. **Start upgrade** — Select firmware, tap START
4. **Confirm & done** — Wait for 100%, tap Exit